

## eFilm Setup Guide

This guide will walk you through setting up eFilm on your hospitals computers. Below is information you will need to enter after the software has installed. If at any point you require assistance, please contact Technical Support at 1-800-819-5538

AE Title:

IP Address:


Port: 104

IC Port: 3333


1. Double click the **set-up** icon to run the InstallShield Wizard.  
NOTE: You must be logged in as an Administrator. In Windows 7/Vista - right click the **setup** icon and choose to "Run as Administrator"



2. Click **Install**. The setup files will extract. This can take several minutes.

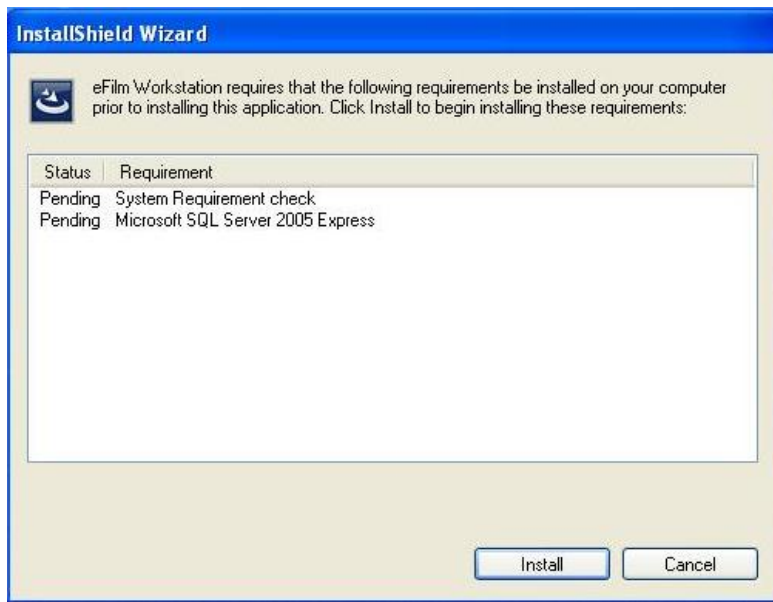


3. Click Next

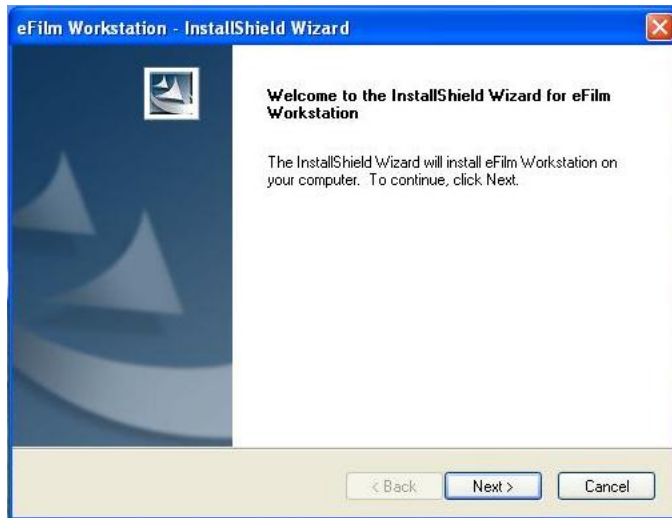


4. Enter

- a. Username: SoundEklin
- b. Company Name: SoundEklin

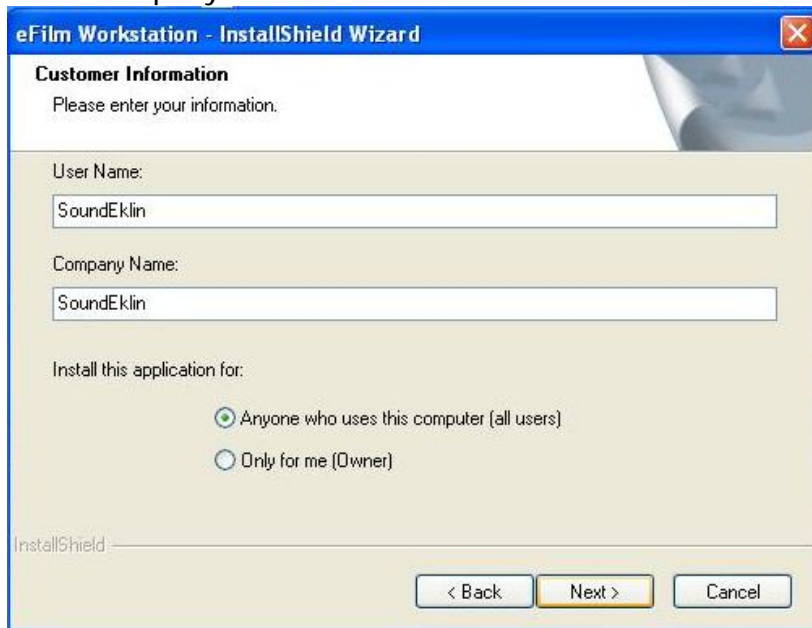

5. Click Next to continue the installation.

6. Click Next at Choose Destination Location window

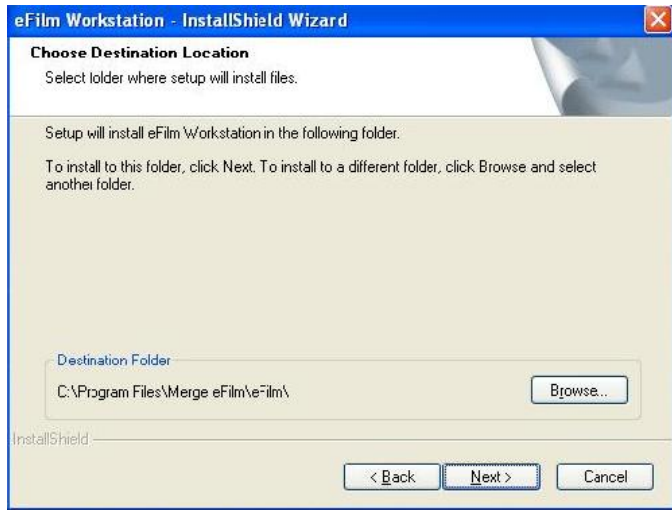

7. Enter the following information


- a. AE Title: Use the name of the computer you are on (EXAM2, PHARM, TREATMENT, etc)
- b. Port: 4006
- c. click Next



8. Make sure **Typical** is chosen and click **Next**




9. Click **Next** to start copying files

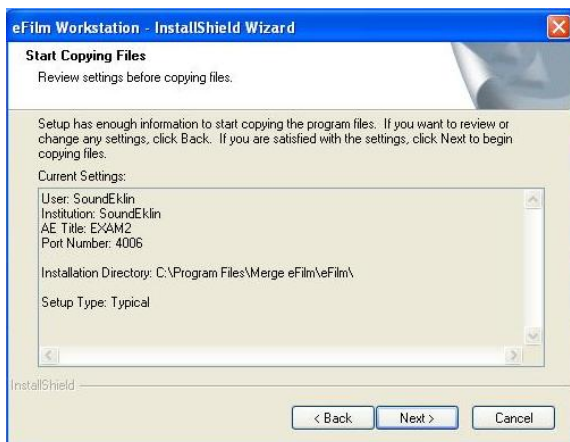

10. Click OK when the InstallShield Wizard tells you that it will need to restart the machine




11. Choose Yes, I want to restart my computer now and click Finish

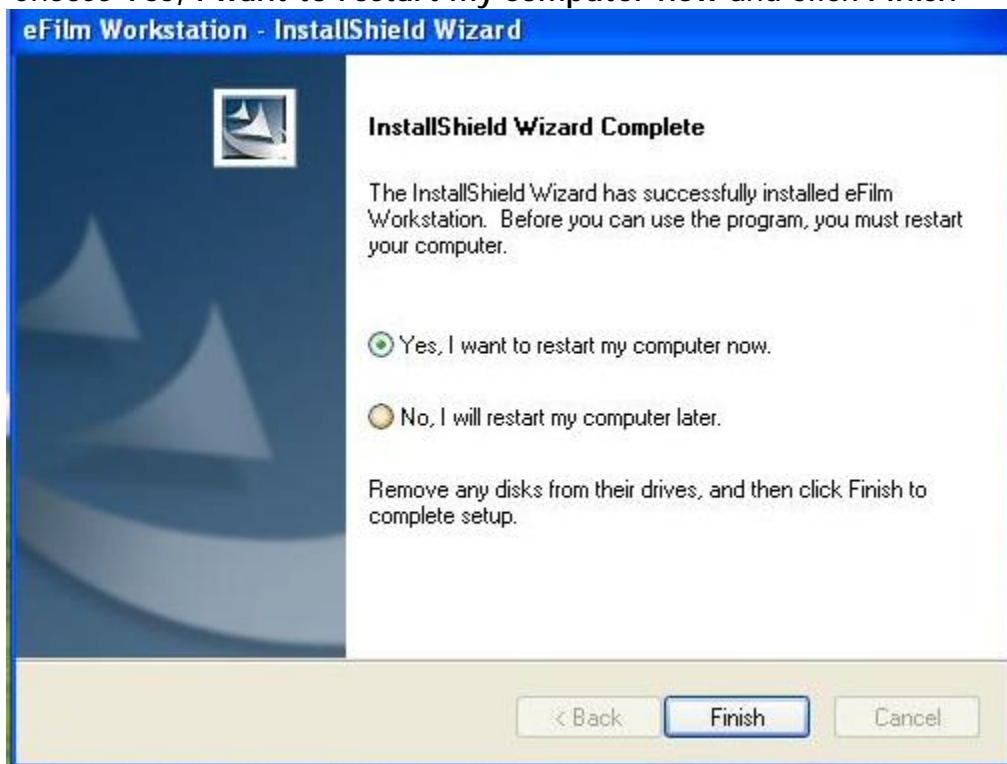

12. When your computer restarts, double click the eFilm icon on the desktop



13. Click **Register** when the software starts

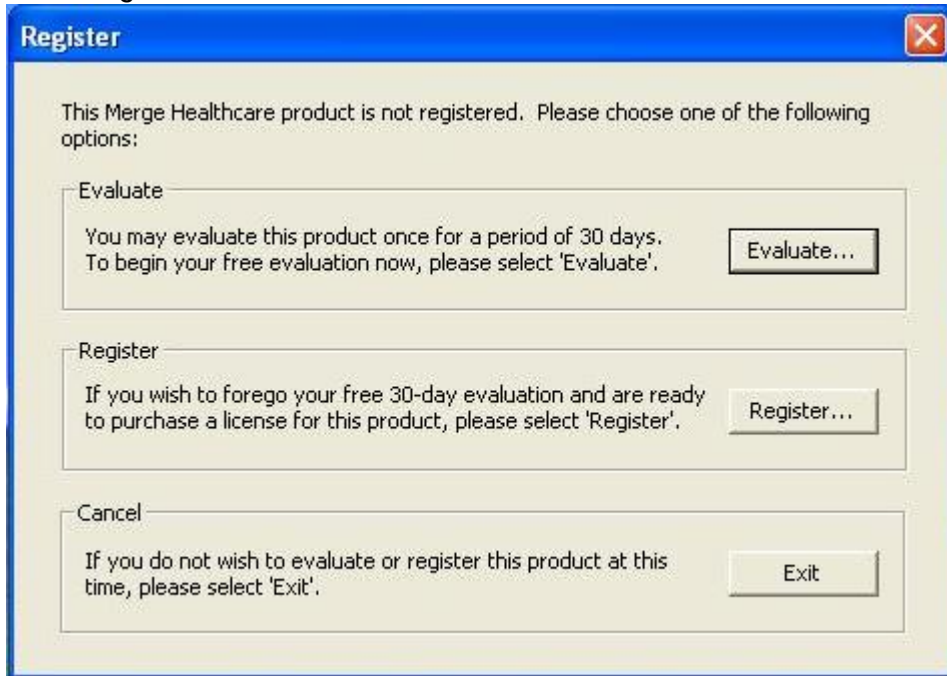


14. Click **Yes** when it asks if you want to continue the Registration






15. Choose Client when it asks for the Registration Type

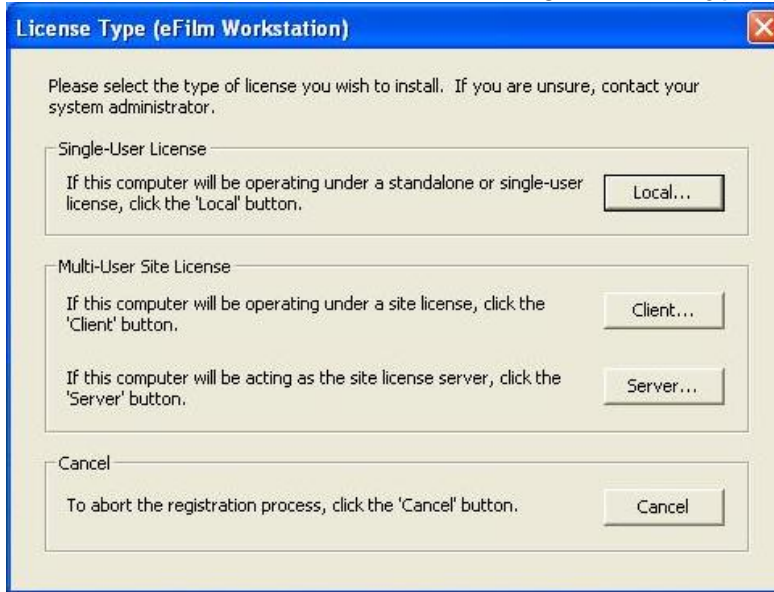

16. Enter the IP address of your server in the Primary Server field. This is found at the top of this document

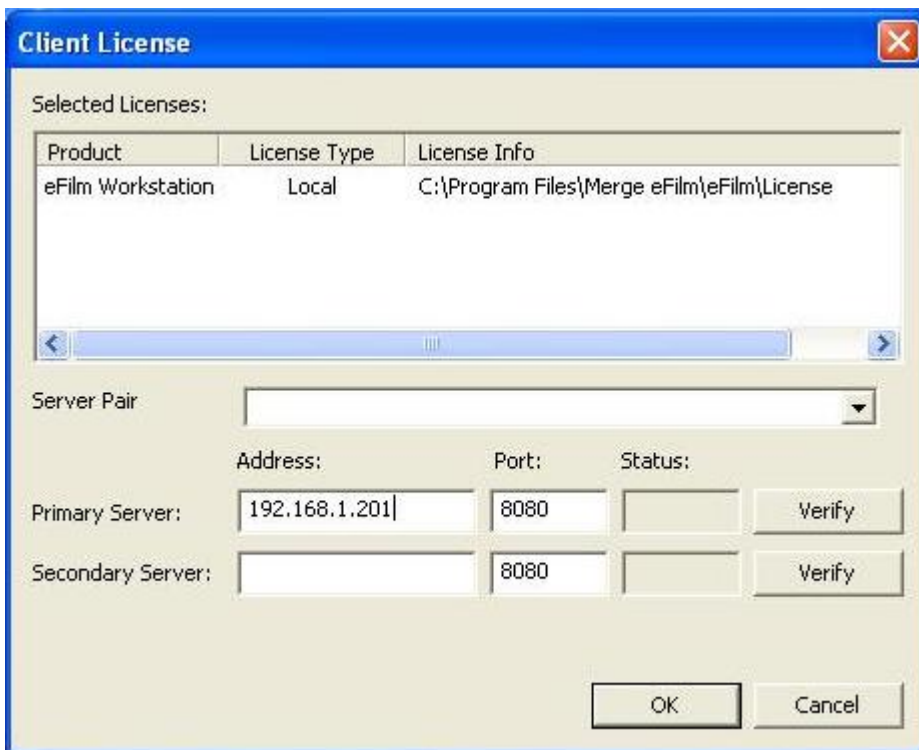

17. Click **Verify**. The Status field should read *Passed*

	Address:	Port:	Status:	
Primary Server:	192.168.1.201	8080	Passed	<input type="button" value="Verify"/>
Secondary Server:		8080		<input type="button" value="Verify"/>

18. Click **OK**, then click **Yes** when it tells you the Secondary Server is offline




19. Click **OK** to close the Client License window

20. The eFilm software will now load. Click the **Settings** button





21. Ensure the following are checked/unchecked, then click OK
- Checked: Bypass user authentication
  - Checked: Bypass login when automated
  - Unchecked: Enable audit
  - Checked: Disable login timeout
  - Checked: Overlay Fixed
  - Unchecked: Limit Features

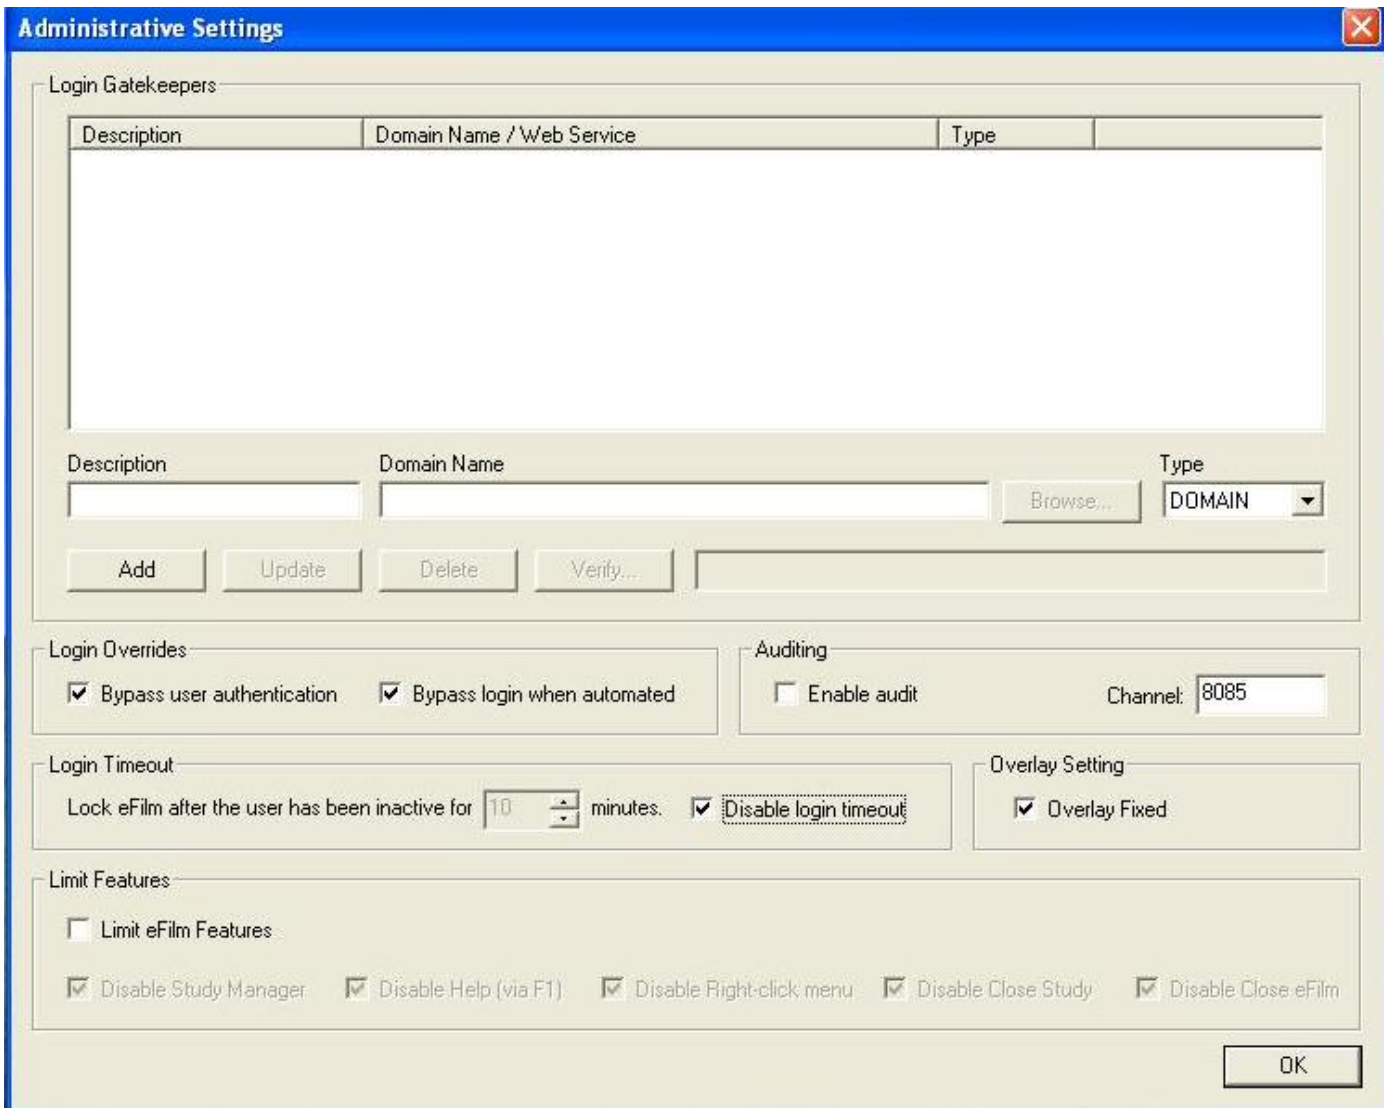

**Administrative Settings**

Login Gatekeepers

Description	Domain Name / Web Service	Type

Description:  Domain Name:  Browse... Type:

Add Update Delete Verify...

Login Overrides

Bypass user authentication  Bypass login when automated

Auditing

Enable audit Channel:

Login Timeout

Lock eFilm after the user has been inactive for  minutes.  Disable login timeout

Overlay Setting

Overlay Fixed

Limit Features

Limit eFilm Features


Disable Study Manager  Disable Help (via F1)  Disable Right-click menu  Disable Close Study  Disable Close eFilm

OK


22. When the software opens, click **Edit**, then click **Properties**



23. Choose the **Image Channel** tab from the Edit Properties page

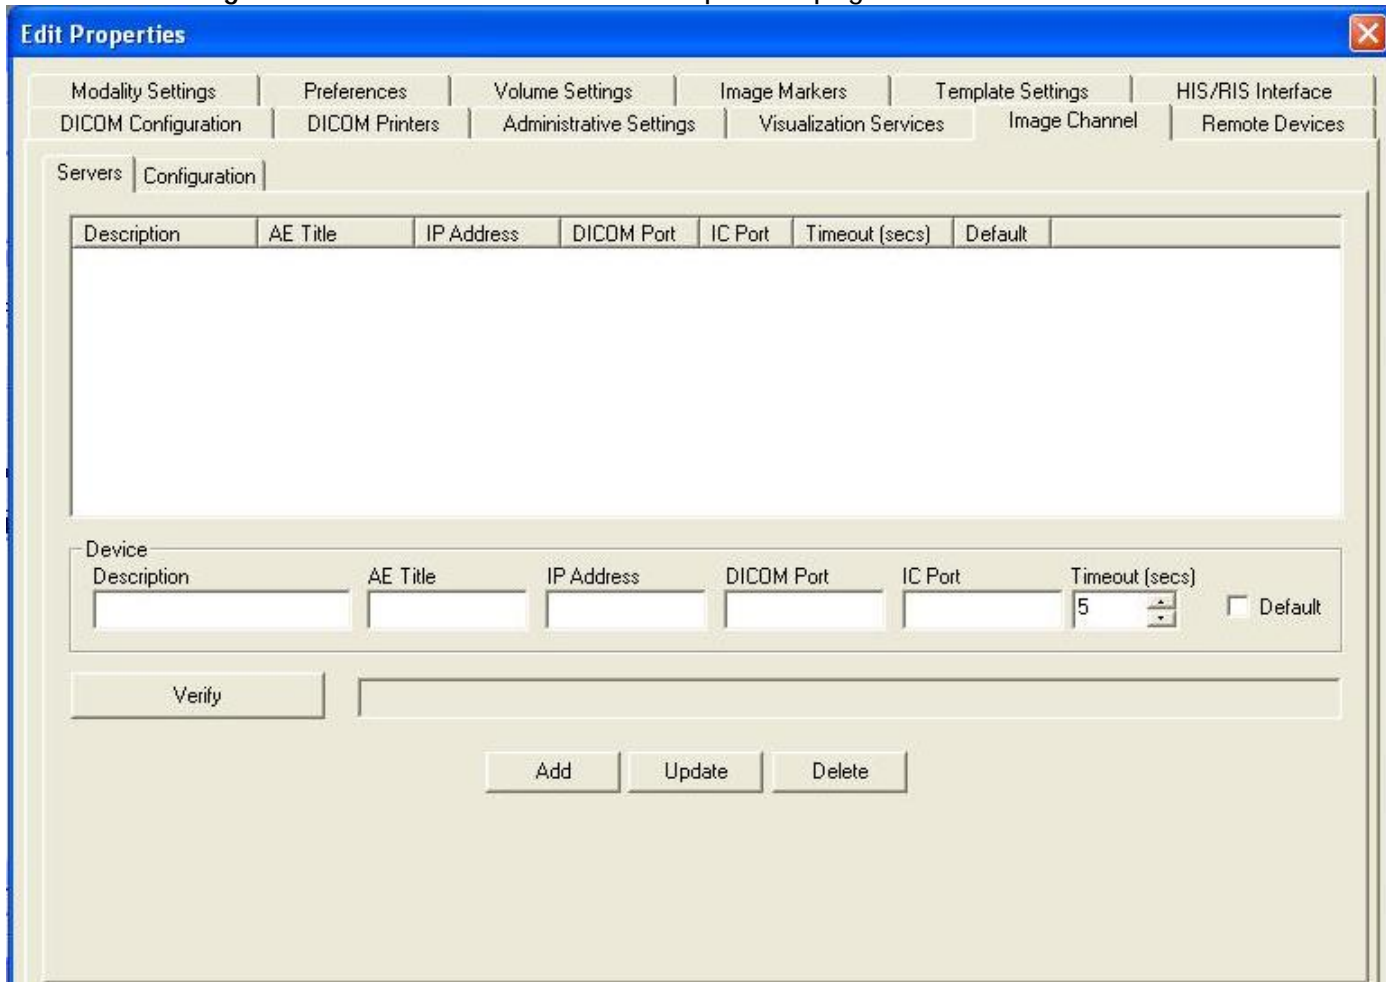

24. Enter the following information in the Device section
  - a. Description: Fusion Server
  - b. AE Title: See Page 1 (This must be entered exactly as it appears, including case)
  - c. IP Address: See Page 1 for the Server's IP Address
  - d. DICOM Port: 104
  - e. IC Port: 3333
  - f. Timeout: 5
  - g. Check the Default box

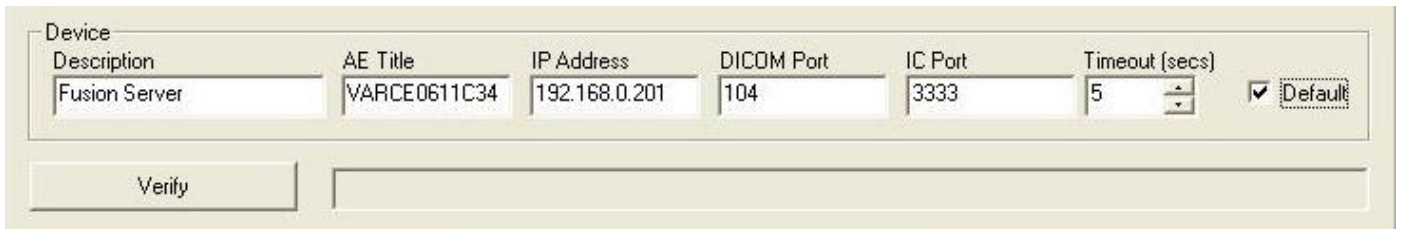

The screenshot shows a 'Device' configuration window with the following fields and values:

Description	AE Title	IP Address	DICOM Port	IC Port	Timeout (secs)	Default
Fusion Server	VARCE0611C34	192.168.0.201	104	3333	5	<input checked="" type="checkbox"/>

Below the form is a 'Verify' button and a status bar.

25. Click the **Add** button

26. Single click the **Fusion Server** in the Servers section

27. Click the **Verify** button. If you do not receive a *verified connection* message, please contact Tech Support at 1-800-819-5538



The screenshot shows a 'Verify' button and a status bar displaying the message: 'Fusion Server - connection verified'.

28. Click the **OK** button to return to the eFilm Study Manager

29. Search for your study using Image Chanel in the Study Manger